


Toggle clamps vertical cam with flat foot

Item description/product images

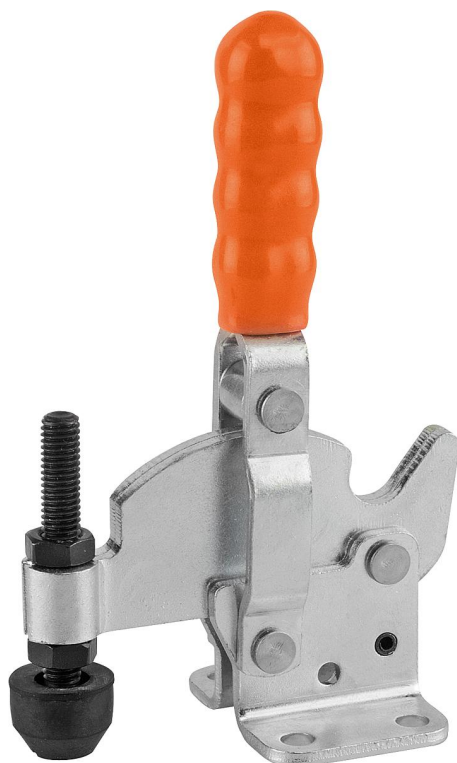

Description

Material:

Steel.

Version:

Trivalent passivated.

Clamping spindle and nuts phosphated.

Plastic grip oil-resistant.

Note:

Cam clamps are ideal for clamping workpieces with a relatively large tolerance such as casting blanks or nonferrous metals.

Accessory:

K0098

K0100

K0101


K0102

K0103

K0106

Toggle clamps vertical cam with flat foot

Drawings

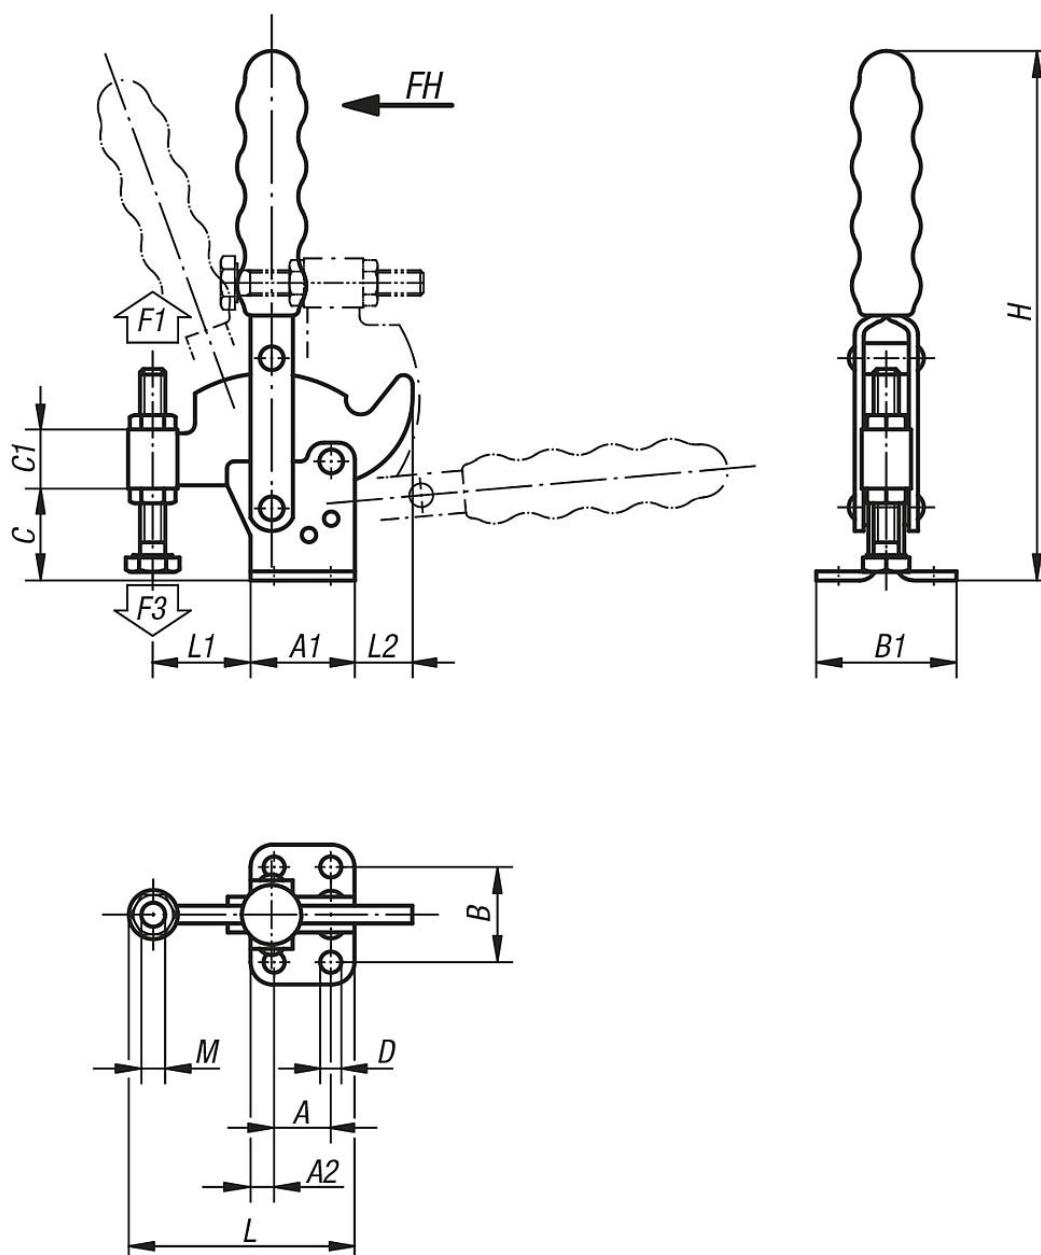

Overview of items

Toggle clamps vertical cam with flat foot

Order No.	Opening angle of holding arm						Opening angle of handle	Hand force FH N	Retaining force F1 N				Clamping force F3 N	Matching plastic grip
K0065.0075	90°						80°	190	750				350 - 600	K0100.16
K0065.0250	85°						80°	190	2500				850 - 1200	K0100.28
K0065.0350	90°						80°	230	3500				950 - 1400	K0100.30
Order No.	A	A1	A2	B	B1	C	C1	D	H	L	L1	L2	M	Order No. Angle bracket
K0065.0075	16	26	5	24	34	16	9,5	4,4	93	52	22	7	M5x35	K0098.02
K0065.0250	19	35	8	32	47	30	21,5	7,1	176	74	32	20	M8x60	K0098.04
K0065.0350	32	50	9	45	64	42	25,5	8,3	220	116	59	13	M10x80	K0098.06