

Ball lock pins stainless steel, with headend lock

Item description/product images



Description

Material:

Grip and push button 1.4305 stainless steel.
Pin 1.4305 stainless steel.
Balls 1.4125 stainless steel.
Spring and hanger 1.4310 stainless steel wire.

Version:

Bright.

Note:

Ball lock pins are used for quick and easy fastening and joining of components. The two balls are disengaged by pressing the push button and the pin can be slipped into holes in the workpieces. Release the button to lock the balls and secure the connection.

Shear force double-shear (F) = S · τ aB max.

Advantages:

Wide connections possible.
The pin length does not need to be coordinated with the component width.

On request:

Other pin lengths.

Accessory:


Adapter bushes for ball lock pins with head lock K1416.
For Form B:
Safety spiral cable K0367
Retaining cable with eyelet K0367
Key ring K0367

Ball lock pins stainless steel, with headend lock

Item description/product images



Drawings

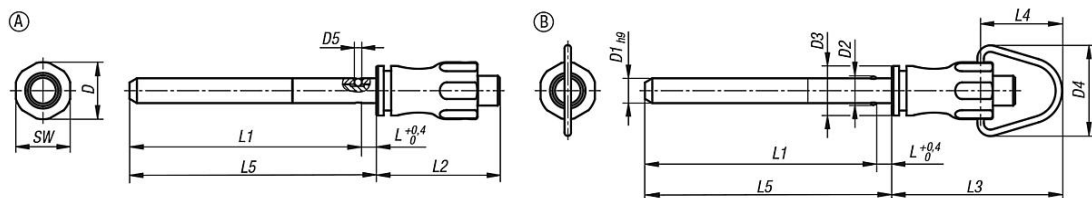

Overview of items

Ball lock pins stainless steel, with head-end lock

Order No.	Form	D	D1	D2	D3	D4	D5	L	L1	L2	L3	L4	L5	SW	Receiving hole H11	Shearing force double shear max.kN
K1414.001205050	A	11,5	5	5,5	10	-	1,5	3	47	25	-	-	50	11	5	10
K1414.001205100	A	11,5	5	5,5	10	-	1,5	3	97	25	-	-	100	11	5	10
K1414.001205150	A	11,5	5	5,5	10	-	1,5	3	147	25	-	-	150	11	5	10
K1414.001206050	A	11,5	6	6,85	10	-	2	3	47	25	-	-	50	11	6	14
K1414.001206100	A	11,5	6	6,85	10	-	2	3	97	25	-	-	100	11	6	14
K1414.001206150	A	11,5	6	6,85	10	-	2	3	147	25	-	-	150	11	6	14
K1414.001508100	A	15,5	8	9,5	13,5	-	3	3,5	96,5	33	-	-	100	15	8	26
K1414.001508150	A	15,5	8	9,5	13,5	-	3	3,5	146,5	33	-	-	150	15	8	26
K1414.001508200	A	15,5	8	9,5	13,5	-	3	3,5	196,5	33	-	-	200	15	8	26
K1414.001510100	A	15,5	10	12	13,5	-	4	3,5	96,5	33	-	-	100	15	10	40
K1414.001510150	A	15,5	10	12	13,5	-	4	3,5	146,5	33	-	-	150	15	10	40
K1414.001510200	A	15,5	10	12	13,5	-	4	3,5	196,5	33	-	-	200	15	10	40
K1414.002112150	A	22	12	14,5	20	-	4,5	3,5	146,5	39,5	-	-	150	21	12	57
K1414.002112200	A	22	12	14,5	20	-	4,5	3,5	196,5	39,5	-	-	200	21	12	57
K1414.002112250	A	22	12	14,5	20	-	4,5	3,5	246,5	39,5	-	-	250	21	12	57
K1414.002116150	A	22	16	19	20	-	6,5	4	146	39,5	-	-	150	21	16	100

Ball lock pins stainless steel, with headend lock

Overview of items

Order No.	Form	D	D1	D2	D3	D4	D5	L	L1	L2	L3	L4	L5	SW	Receiving hole H11	Shearing force double shear max.kN
K1414.002116200	A	22	16	19	20	-	6,5	4	196	39,5	-	-	200	21	16	100
K1414.002116250	A	22	16	19	20	-	6,5	4	246	39,5	-	-	250	21	16	100
K1414.101205050	B	11,5	5	5,5	10	18,3	1,5	3	47	25	34,6	16,6	50	11	5	10
K1414.101205100	B	11,5	5	5,5	10	18,3	1,5	3	97	25	34,6	16,6	100	11	5	10
K1414.101205150	B	11,5	5	5,5	10	18,3	1,5	3	147	25	34,6	16,6	150	11	5	10
K1414.101206050	B	11,5	6	6,85	10	18,3	2	3	47	25	34,6	16,6	50	11	6	14
K1414.101206100	B	11,5	6	6,85	10	18,3	2	3	97	25	34,6	16,6	100	11	6	14
K1414.101206150	B	11,5	6	6,85	10	18,3	2	3	147	25	34,6	16,6	150	11	6	14
K1414.101508100	B	15,5	8	9,5	13,5	24	3	3,5	96,5	33	46,7	22,7	100	15	8	26
K1414.101508150	B	15,5	8	9,5	13,5	24	3	3,5	146,5	33	46,7	22,7	150	15	8	26
K1414.101508200	B	15,5	8	9,5	13,5	24	3	3,5	196,5	33	46,7	22,7	200	15	8	26
K1414.101510100	B	15,5	10	12	13,5	24	4	3,5	96,5	33	46,7	22,7	100	15	10	40
K1414.101510150	B	15,5	10	12	13,5	24	4	3,5	146,5	33	46,7	22,7	150	15	10	40
K1414.101510200	B	15,5	10	12	13,5	24	4	3,5	196,5	33	46,7	22,7	200	15	10	40
K1414.102112150	B	22	12	14,5	20	33	4,5	3,5	146,5	39,5	59,3	30,3	150	21	12	57
K1414.102112200	B	22	12	14,5	20	33	4,5	3,5	196,5	39,5	59,3	30,3	200	21	12	57
K1414.102112250	B	22	12	14,5	20	33	4,5	3,5	246,5	39,5	59,3	30,3	250	21	12	57
K1414.102116150	B	22	16	19	20	33	6,5	4	146	39,5	59,3	30,3	150	21	16	100
K1414.102116200	B	22	16	19	20	33	6,5	4	196	39,5	59,3	30,3	200	21	16	100
K1414.102116250	B	22	16	19	20	33	6,5	4	246	39,5	59,3	30,3	250	21	16	100