

Toggle clamps vertical with angled foot and fixed clamping spindle

Item description/product images



Description

Material:

Steel.

Version:

Trivalent passivated.

Clamping spindle and nuts phosphated.

Plastic grip oil-resistant.

Note:

A neoprene thrust pad is supplied with versions K1436.00800 and K1436.01600.

Accessory:

K0688

K0689

K0690

K0101

K1442

K0102

K0103


K1443

K0104


K0106

Toggle clamps vertical with angled foot and fixed clamping spindle

Item description/product images

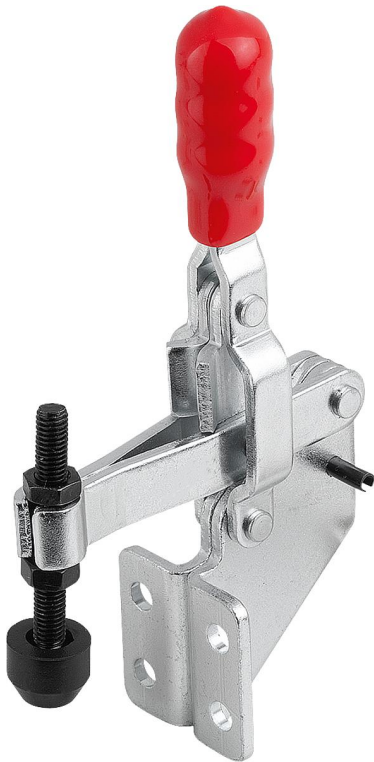

Drawings

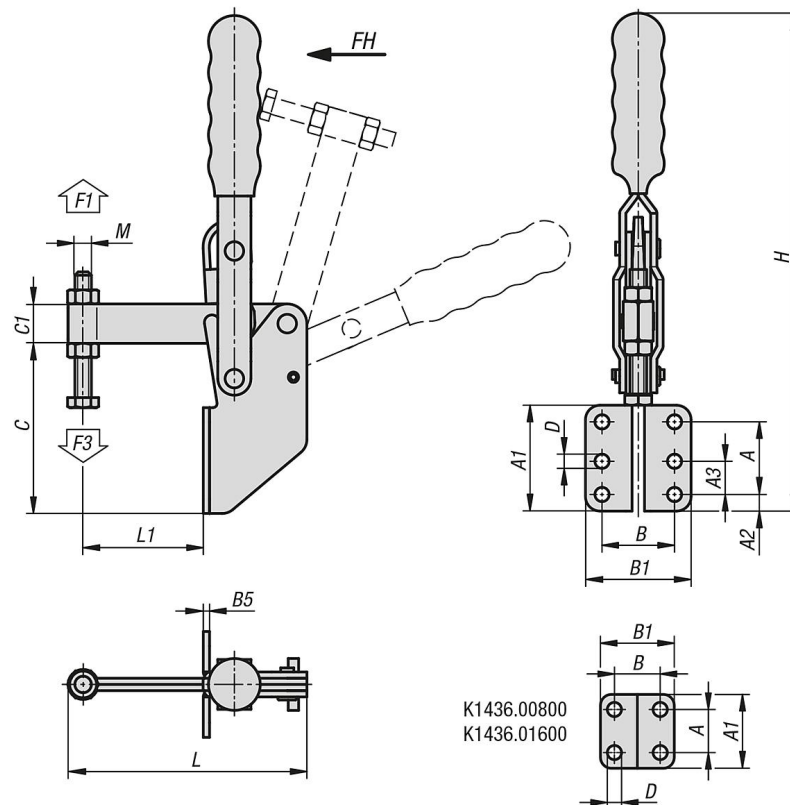

Toggle clamps vertical with angled foot and fixed clamping spindle

Overview of items

Toggle clamps vertical with angled foot and fixed clamping spindle

Order No.			Opening angle of holding arm					Opening angle of handle			Hand force FH N		Retaining force F1 N		Clamping force F3 N	
K1436.00800			96°					69°			50		800		600	
K1436.01600			108°					70°			100		1600		1100	
K1436.03000			106°					67°			100		3000		1100	
Order No.			A	A1	A2	A3	B	B1	B5	C	C1	D	H	L	L1	M
K1436.00800			14	29	-	-	17,5	28	2,5	44	10	4,9	121	65,65	24,5	M5x35
K1436.01600			19	35	-	-	26	42	3	64	13	5,5	170	75,7	26	M6x50
K1436.03000			35	51	8	16	35	51	3	82	19	6,8	244	115,3	58	M8x60