


Toggle clamps horizontal with straight foot and adjustable clamping spindle

Item description/product images

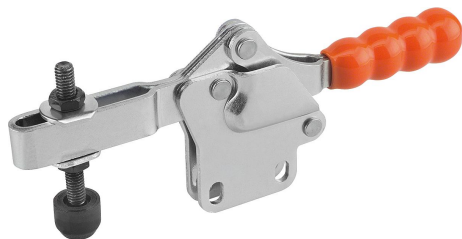

Description

Material:

Steel.

Version:

Trivalent passivated.

Clamping spindle and nuts phosphated.

Plastic grip oil-resistant.

Note:

A neoprene thrust pad is supplied with versions K0072.0075 and K0072.0150.

Accessory:

K0100

K0101

K0102


K0103

K0106

K0107

Toggle clamps horizontal with straight foot and adjustable clamping spindle

Drawings

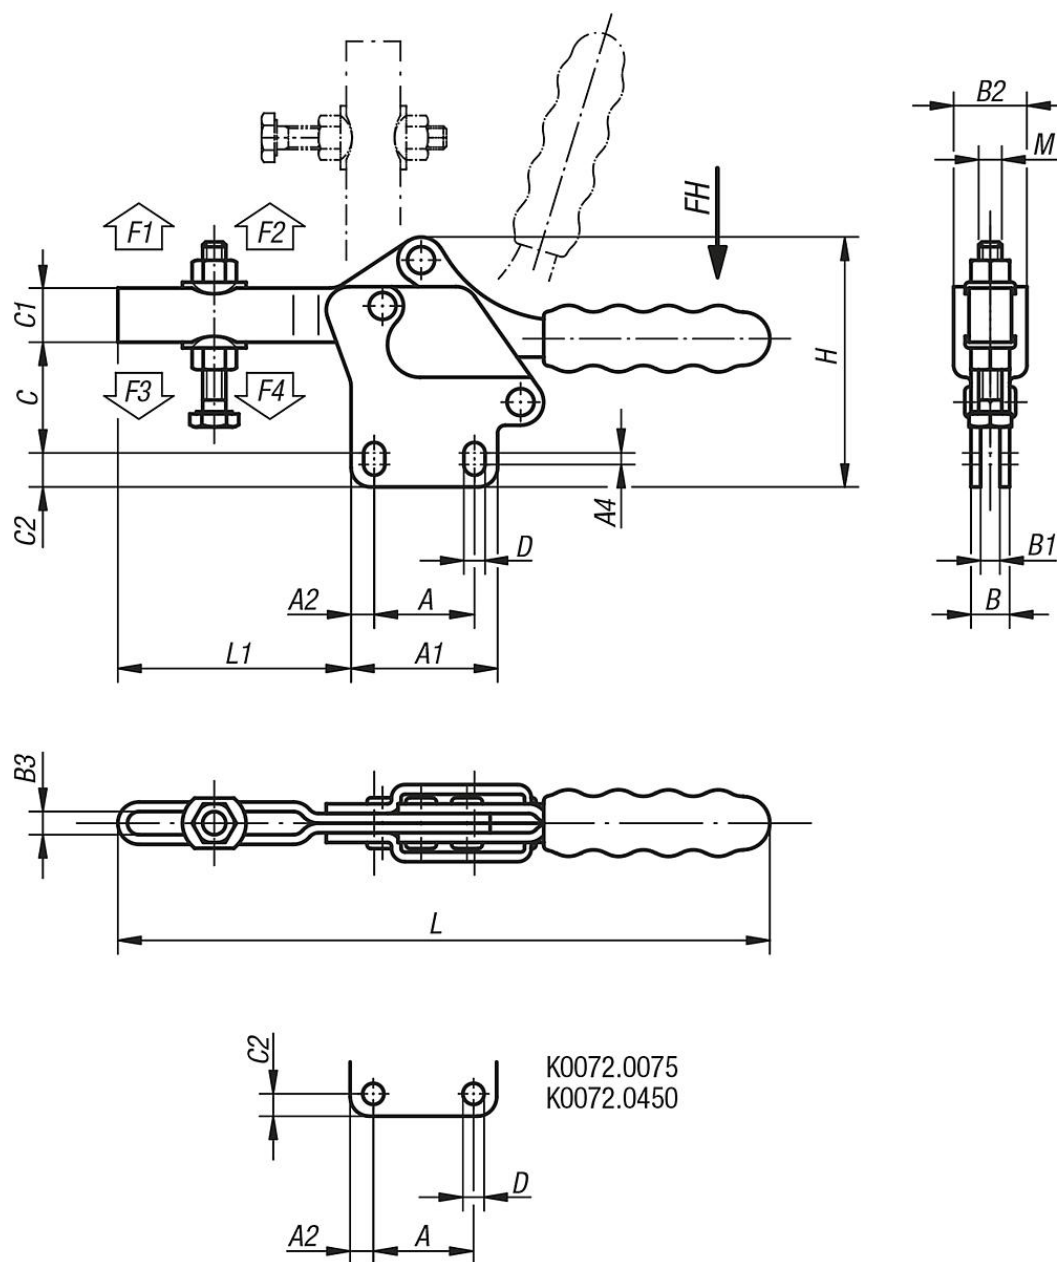

Overview of items

Toggle clamps horizontal with straight foot and adjustable clamping spindle

Order No.	Opening angle of holding arm			Opening angle of handle		Hand force FH N		Retaining force F1 N		Retaining force F2 N		Clamping force F3 N		Clamping force F4 N		Matching plastic grip
K0072.0075	90°			75°		80		500		1100		250		700		K0100.16
K0072.0150	90°			80°		140		1200		2600		400		1000		K0100.20
K0072.0250	95°			80°		200		1500		3500		800		1950		K0100.28
K0072.0350	90°			75°		250		2500		5500		1150		3100		K0100.30
K0072.0450	90°			75°		250		3000		6500		1150		3100		K0100.34
Order No.	A	A1	A2	A4	B	B1	B2	B3	C	C1	C2	D	H	L	L1	M
K0072.0075	13,5	25	5,7	-	8	4	16	5,8	22	9,5	5	5,2	46	116	37	M5x35
K0072.0150	26	38	6	3	10	5	20	6,2	28	14	9	5,5	66	170	60	M6x50
K0072.0250	26	42	8	2,6	12	6	23	9	39	17,5	10	6,6	82	224	79	M8x60

Toggle clamps horizontal with straight foot and adjustable clamping spindle

Overview of items

Order No.	A	A1	A2	A4	B	B1	B2	B3	C	C1	C2	D	H	L	L1	M
K0072.0350	41,2	59	9	2	16	8	30	12	54	24	10	8,7	109,5	274	108	M10x80
K0072.0450	41,2	67	13	-	20	10	38	13,2	66	27	13	8,7	130	305	129	M12x100