

Toggle clamps horizontal with safety interlock with straight foot and adjustable clamping spindle

Item description/product images

KIPPl⁺ock



Description

Material:

Steel.

Grip polyamide.

Unlocking bracket TPE.

Version:

Carbonitrided and black oxidised.

Grip element blue, black or red.

Note:

Maintenance-free high quality link bushings. Sustainable constant force during opening and closing. Optimum stability through the conical, U-profile clamping arm. Including internal bar lock with automatic safety catch.

On request:

Other grip colours.

Accessory:

K0106

K0383


K0388

K0390

K0391

K0392

K0393

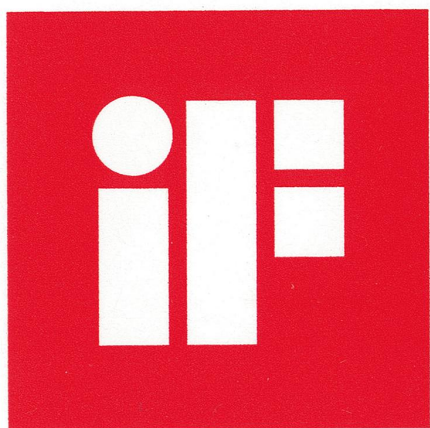


product
design
award

Toggle clamps horizontal with safety interlock with straight foot and adjustable clamping spindle

Item description/product images



Drawings

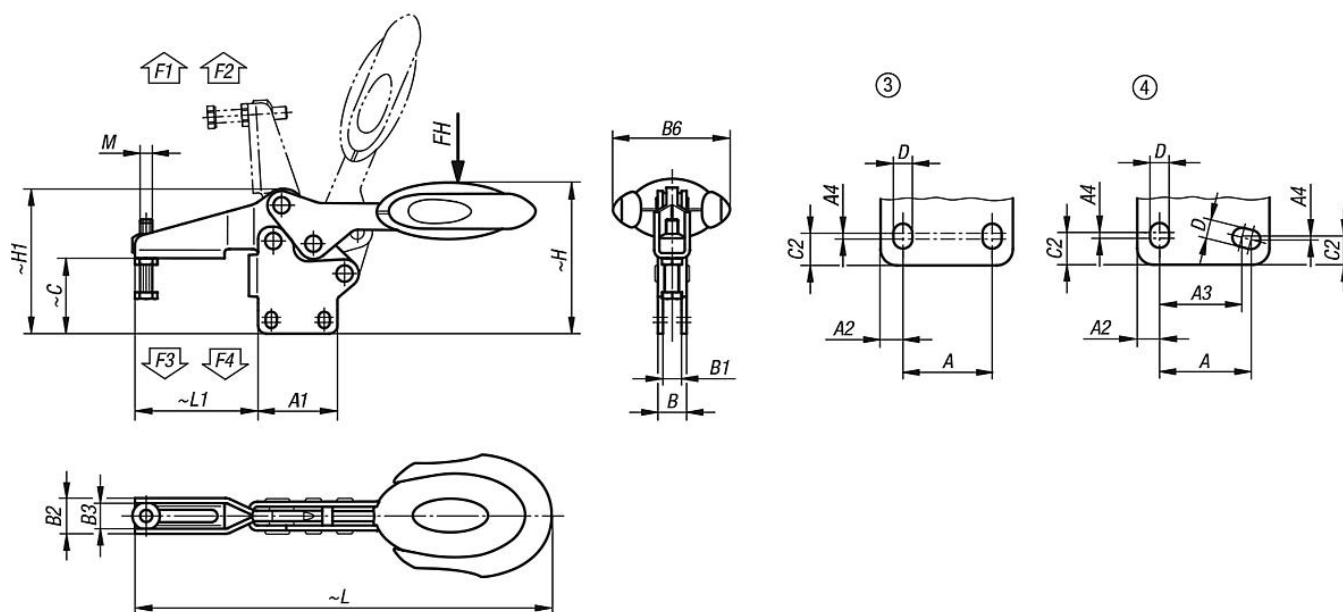

Overview of items

Toggle clamps horizontal with safety interlock with straight foot and adjustable clamping spindle

Order No.	Component colour	hole arrangement	Opening angle of holding arm				Opening angle of handle		Hand force FH N	Retaining force F1 N		Retaining force F2 N		Clamping force F3 N		Clamping force F4 N			
K0661.006101	ultramarine RAL 5002	3	86°				67°		160	1350		1900		720		1200			
K0661.008101	ultramarine RAL 5002	3	86°				67°		200	2000		2800		830		1400			
K0661.010101	ultramarine RAL 5002	3	90°				71°		250	2200		4500		1200		2800			
K0661.012101	ultramarine RAL 5002	4	88°				68°		280	2400		5500		1000		2800			
K0661.006100	black grey RAL 7021	3	86°				67°		160	1350		1900		720		1200			
K0661.008100	black grey RAL 7021	3	86°				67°		200	2000		2800		830		1400			
K0661.010100	black grey RAL 7021	3	90°				71°		250	2200		4500		1200		2800			
K0661.012100	black grey RAL 7021	4	88°				68°		280	2400		5500		1000		2800			
K0661.006103	red	3	86°				67°		160	1350		1900		720		1200			
K0661.008103	red	3	86°				67°		200	2000		2800		830		1400			
K0661.010103	red	3	90°				71°		250	2200		4500		1200		2800			
K0661.012103	red	4	88°				68°		280	2400		5500		1000		2800			
Order No.	Component colour	M	A	A1	A2	A3	A4	B	B1	B2	B3	B6	C	C2	D	H	H1	L	L1
K0661.006101	ultramarine RAL 5002	M6x35	26	39	6,5	-	2,5	14,1	9,1	17,5	12,5	53,4	36,9	8	5,5	75,2	71	193,3	60,5
K0661.008101	ultramarine RAL 5002	M8x45	26	44	9	-	3,5	14,1	9,1	21	16	51,1	46,5	10,5	6,2	88,2	84,3	230,4	74,9
K0661.010101	ultramarine RAL 5002	M10x55	41,5	59	9	-	2	16,2	9,2	26	19	56,5	59,6	10	8,8	114,3	107,5	286	103,9

Toggle clamps horizontal with safety interlock with straight foot and adjustable clamping spindle

Overview of items

Order No.	Component colour	M	A	A1	A2	A3	A4	B	B1	B2	B3	B6	C	C2	D	H	H1	L	L1
K0661.012101	ultramarine RAL 5002	M12x70	44	65	11	40	1	16,2	9,2	28	21	56,5	75,9	13,5	8,5	128,4	125,2	321,3	122
K0661.006100	black grey RAL 7021	M6x35	26	39	6,5	-	2,5	14,1	9,1	17,5	12,5	53,4	36,9	8	5,5	75,2	71	193,3	60,5
K0661.008100	black grey RAL 7021	M8x45	26	44	9	-	3,5	14,1	9,1	21	16	51,1	46,5	10,5	6,2	88,2	84,3	230,4	74,9
K0661.010100	black grey RAL 7021	M10x55	41,5	59	9	-	2	16,2	9,2	26	19	56,5	59,6	10	8,8	114,3	107,5	286	103,9
K0661.012100	black grey RAL 7021	M12x70	44	65	11	40	1	16,2	9,2	28	21	56,5	75,9	13,5	8,5	128,4	125,2	321,3	122
K0661.006103	red	M6x35	26	39	6,5	-	2,5	14,1	9,1	17,5	12,5	53,4	36,9	8	5,5	75,2	71	193,3	60,5
K0661.008103	red	M8x45	26	44	9	-	3,5	14,1	9,1	21	16	51,1	46,5	10,5	6,2	88,2	84,3	230,4	74,9
K0661.010103	red	M10x55	41,5	59	9	-	2	16,2	9,2	26	19	56,5	59,6	10	8,8	114,3	107,5	286	103,9
K0661.012103	red	M12x70	44	65	11	40	1	16,2	9,2	28	21	56,5	75,9	13,5	8,5	128,4	125,2	321,3	122