


Connectors with screw fitting

Item description/product images

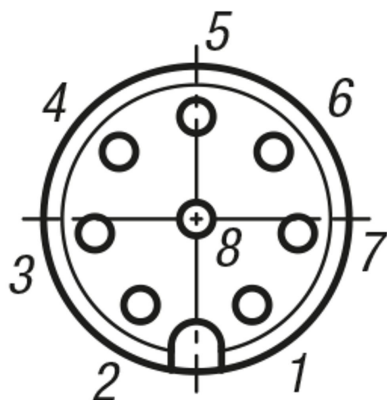

Description

Material:

Cable sheath and housing PVC.

Version:

Bush (female)
Voltage: Ue 30 V
Current: Ie 2 A
No. of pins: 8
No. of wires: 8
Rating: IP 67
Grip body: black
Cable: grey

Note:

Connector with screw lock.
Connector moulded to cable.
Wires colour coded acc. to DIN 47100.
Coding A.
Limited dragchain compatibility.
Recommended tightening torque: 1.0 Nm.

Temperature range:


Moving: 0 °C to +80 °C
Fixed: -25 °C to +80 °C

Drawing reference:

- 1) White (WH)
- 2) Brown (BN)
- 3) Green (GN)
- 4) Yellow (YE)
- 5) Grey (GY)
- 6) Pink (PK)
- 7) Blue (BU)
- 8) Red (RD)

Connectors with screw fitting

Drawings

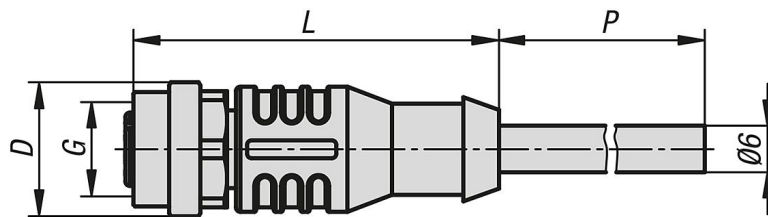

Overview of items

Connectors with screw fitting

Order No.	D	G	L	P	No. of conductors x conductor cross-section
K1498.1208X2500	14,5	M12x1	41,5	2500	8 x 0,25 mm ²
K1498.1208X5000	14,5	M12x1	41,5	5000	8 x 0,25 mm ²
K1498.1208X10000	14,5	M12x1	41,5	10000	8 x 0,25 mm ²