


Toggle clamps horizontal with flat foot and adjustable clamping spindle

Item description/product images

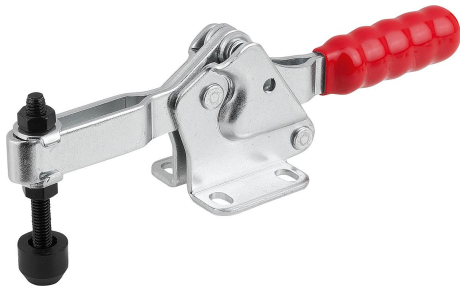

Description

Material:

Steel or stainless steel.

Version:

Electro zinc-plated steel.

Bright stainless steel.

Plastic handle, oil-resistant.

Note:

A neoprene thrust pad is supplied with versions K1241.02500 and K1241.12500.

Accessory:

K0688

K0689

K0690

K0101

K1442

K0102

K0103

K1443

K0104


K0106

K1441

K1431




Drawings

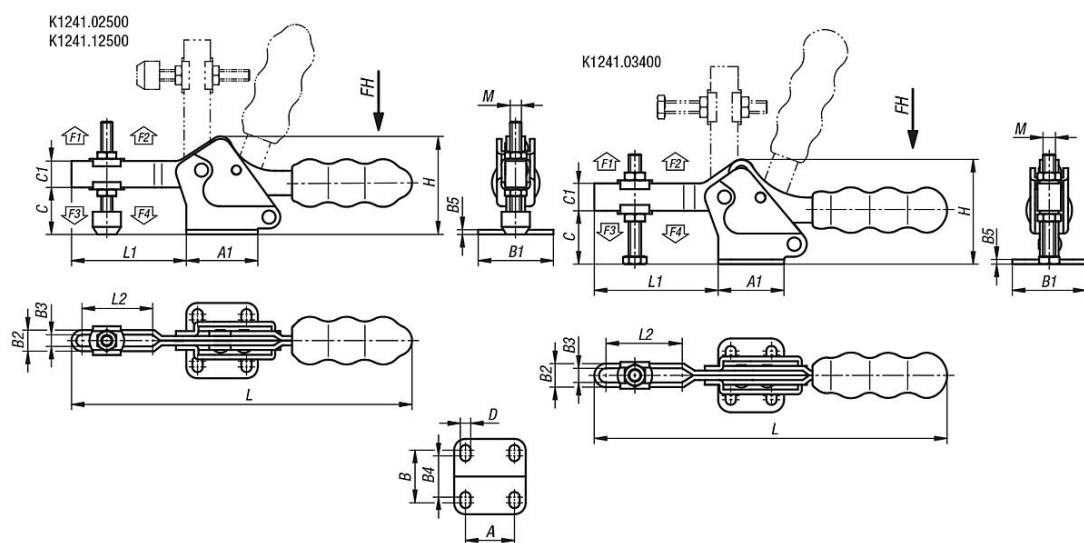

Toggle clamps horizontal with flat foot and adjustable clamping spindle

Drawings

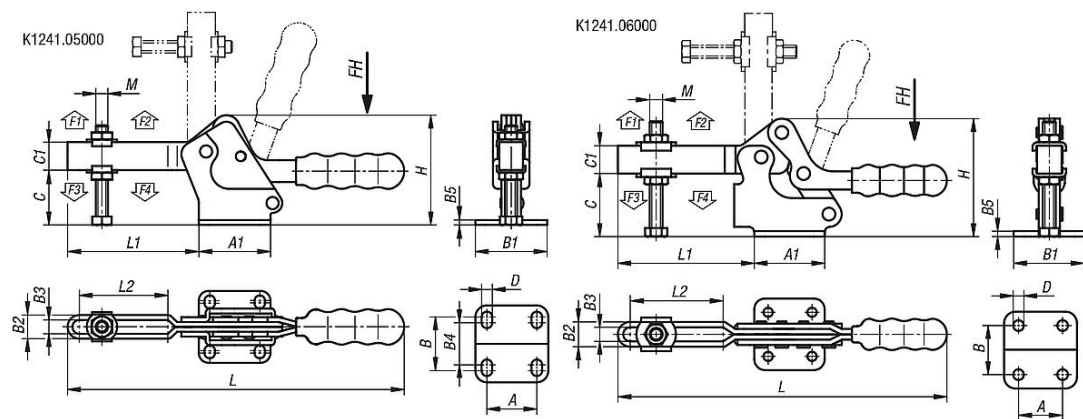

Overview of items

Toggle clamps horizontal with flat foot and adjustable clamping spindle

Order No.	Main material	Opening angle of holding arm				Opening angle of handle				Hand force FH N		Retaining force F1 N		Retaining force F2 N		Clamping force F3 N		Clamping force F4 N	
K1241.02500	steel	93°				76°				150		1200		2500		400		1000	
K1241.03400	steel	90°				72°				200		1400		3400		800		1900	
K1241.05000	steel	90°				72°				250		2200		5000		1100		3000	
K1241.06000	steel	94°				80°				250		3000		6000		1200		3200	
K1241.12500	stainless steel	93°				76°				150		1200		2500		400		1000	
Order No.	Main material	A	A1	B	B1	B2	B3	B4	B5	C	C1	D	H	L	L1	L2	M		
K1241.02500	steel	26	38	28	40	11,2	6,2	22	2,5	25	14	5,5	52,1	173	61	37,5	M6x50		
K1241.03400	steel	26	42	31	47	15	9	26	3	34	17,5	6,6	66,5	225	79	48,6	M8x60		
K1241.05000	steel	41,2	59	43	59	19,4	11,4	39	4	45	23	8,7	90,1	277	108	72,9	M10x80		
K1241.06000	steel	41,2	66	41,3	67	23,2	13,2	-	5	59	26	8,7	110,4	308	128	87,2	M12x100		
K1241.12500	stainless steel	26	38	28	40	11,2	6,2	22	2,5	25	14	5,5	52,1	173	61	37,5	M6x50		