


Wedge clamps jaw face smooth or serrated

Item description/product images

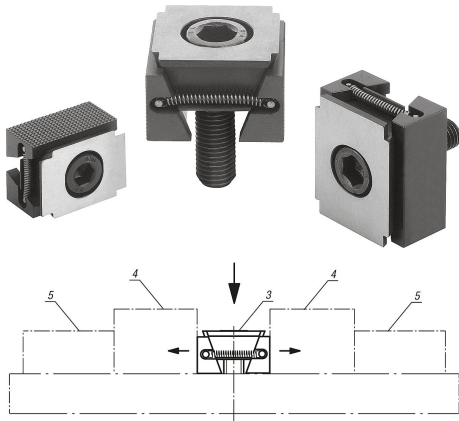

Description

Material:

Wedge and jaw segments carbon steel.

Version:

Wedge and jaw segments hardened, black.

Note:

The functioning principle make the wedge clamps ideal for series clamping. The wedge form can exert high clamping forces.

These wedge clamps can be mounted in grid holes or T-slots. Tightening the socket screw moves the wedge down and the jaws out pressing the workpieces against the fixtures fixed stops.

The wedge has a slightly elongated hole allowing for movement to compensate for tolerances.

Spread width:

M8 = ± 0.5 mm

M10 = ± 1.0 mm

M12 = ± 1.0 mm

M16 = ± 1.5 mm

Drawing reference:

1) Jaw face smooth

2) Jaw face serrated

D) DIN 6912 cap screw


3) Wedge clamps

4) Workpiece

5) Fixed stop

Wedge clamps jaw face smooth or serrated

Drawings

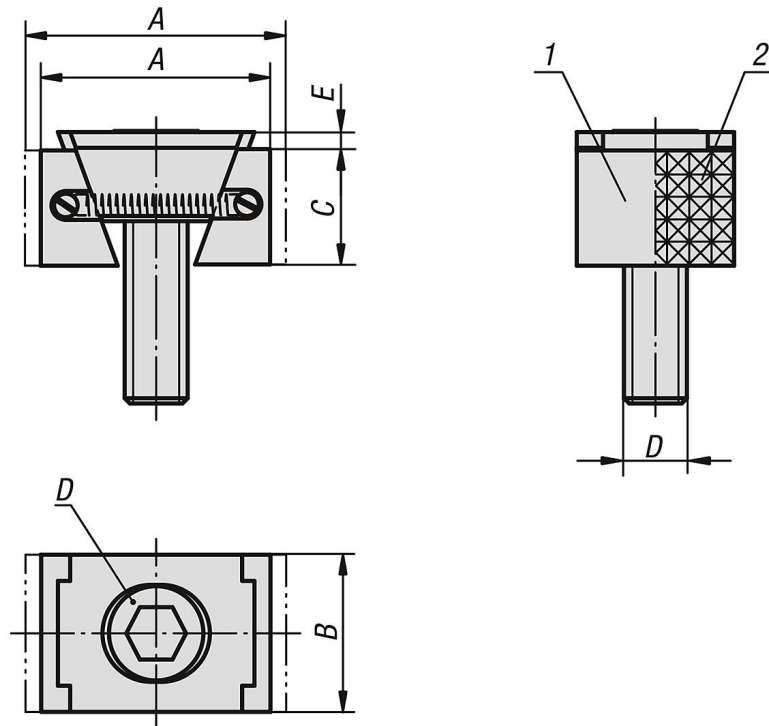

Overview of items

Wedge clamps, narrow version

Order No.	Version	A min.	A max.	B	C	D	E	Clamping force max. kN	Tightening torque max. Nm
K0039.1108	smooth version	30,5	33,5	24	15	M8X25	2	15	25
K0039.1110	smooth version	32	37	28	19	M10X25	3,5	20	49
K0039.1112	smooth version	44	49,5	30	22	M12X40	3,5	30	85
K0039.1116	smooth version	55	62	40	29	M16X60	4	50	210
K0039.2108	serrated	30,5	33,5	24	15	M8X25	2	15	25
K0039.2110	serrated	32	37	28	19	M10X25	3,5	20	49
K0039.2112	serrated	44	49,5	30	22	M12X40	3,5	30	85
K0039.2116	serrated	55	62	40	29	M16X60	4	50	210
K0039.1208	smooth version	30,5	33,5	30	15	M8X25	2	15	25
K0039.1210	smooth version	32	37	38	19	M10X25	3,5	20	49
K0039.1212	smooth version	44	49,5	48	22	M12X40	3,5	30	85
K0039.1216	smooth version	55	62	48	29	M16X60	4	50	210
K0039.2208	serrated	30,5	33,5	30	15	M8X25	2	15	25
K0039.2210	serrated	32	37	38	19	M10X25	3,5	20	49
K0039.2212	serrated	44	49,5	48	22	M12X40	3,5	30	85
K0039.2216	serrated	55	62	48	29	M16X60	4	50	210