


Toggle clamps horizontal with straight foot and adjustable clamping spindle

Item description/product images

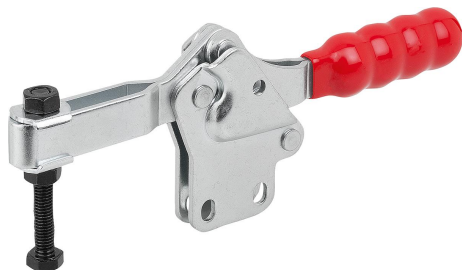

Description

Material:

Steel.

Version:

Electro zinc-plated steel.

Plastic handle, oil-resistant.

Note:

A neoprene thrust pad is supplied with versions K1239.01000, K1239.02500 and K1239.03200.

Accessory:

K0688

K0689

K0690

K0101

K1442

K0102

K0103

K1443

K0104


K0106

K1441



Toggle clamps horizontal with straight foot and adjustable clamping spindle

Drawings

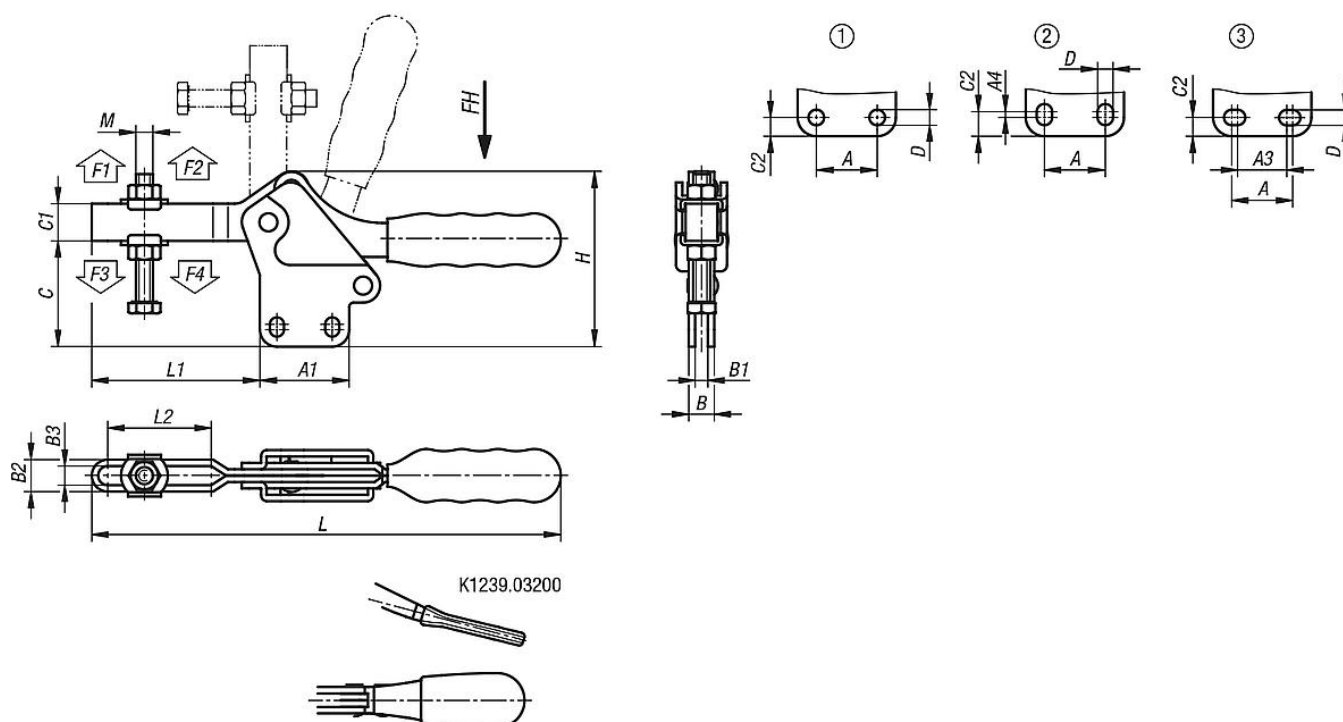

Overview of items

Toggle clamps horizontal with straight foot and adjustable clamping spindle

Order No.	hole arrangement				Opening angle of holding arm				Opening angle of handle	Hand force FH N	Retaining force F1 N		Retaining force F2 N		Clamping force F3 N		Clamping force F4 N
K1239.01000	1				96°				78°	50	500		1000		250		600
K1239.02500	2				93°				76°	150	1200		2500		400		1000
K1239.03200	3				90°				65°	150	2000		3200		800		1600
K1239.03400	2				90°				72°	200	1400		3400		800		1900
K1239.05400	2				94°				76°	250	2400		5400		1100		3000
K1239.06400	1				94°				80°	250	3000		6400		1100		3000
Order No.	A	A1	A3	A4	B	B1	B2	B3	C	C1	C2	D	H	L	L1	L2	M
K1239.01000	13,5	25	-	-	8	4	9,3	5,1	27,5	9,5	5,1	5,2	47	110	37	25	M5x35
K1239.02500	26	38	-	3	10	5	11,2	6,3	38,2	14	9	5,5	65,4	173	61	40,6	M6x50
K1239.03200	25,4	38	20,8	-	12	6	14,7	8,7	48,3	12,7	6,4	6,7	61	173	71,6	39,1	M8x63
K1239.03400	26	42	-	2,5	12	6	15	8,6	49,7	17,5	10,5	6,6	82,2	225	79	52,7	M8x60
K1239.05400	41,2	59	-	2	16	8	19,4	11,5	63,8	23	10	8,7	109	277	108	79,5	M10x80
K1239.06400	41,2	66	-	-	20	10	23,2	13,7	79,6	26	12,9	8,7	131	308	128	93,5	M12x100