K0239

Recessed handles fold-down

Item description/product images

19"

Description

Material:
Tray and grip aluminium profile.
End caps polyamide.
Form A: Rubber profile for mounting.
Form B: 2 steel countersunk screws for mounting.

Version:
Tray and grip glass-bead blasted, satin finish and anodised black or natural colour.
Rubber profile black.
Fastening screws electro zinc-plated.

Note:
Form A handles can be mounted without screws for material thicknesses of 1 - 2.5 mm using 2 rubber profiles.
Form B handles can be mounted from the front with 2 countersunk screws.
Two cross-slots for M4 screws allow earthing connection and can serve as a mounting aid for additional parts.

Assembly:
After fitting the lower rubber profile, press the two side caps onto the handle. Next press the handle over the lower edge of the mounting cutout at a 45° angle and then push it up against the housing panel.
Now push the 2nd rubber profile into the upper groove or fix in place with 2 countersunk screws.

© HEINRICH KIPP WERK KG

Recessed handles fold-down

Drawings

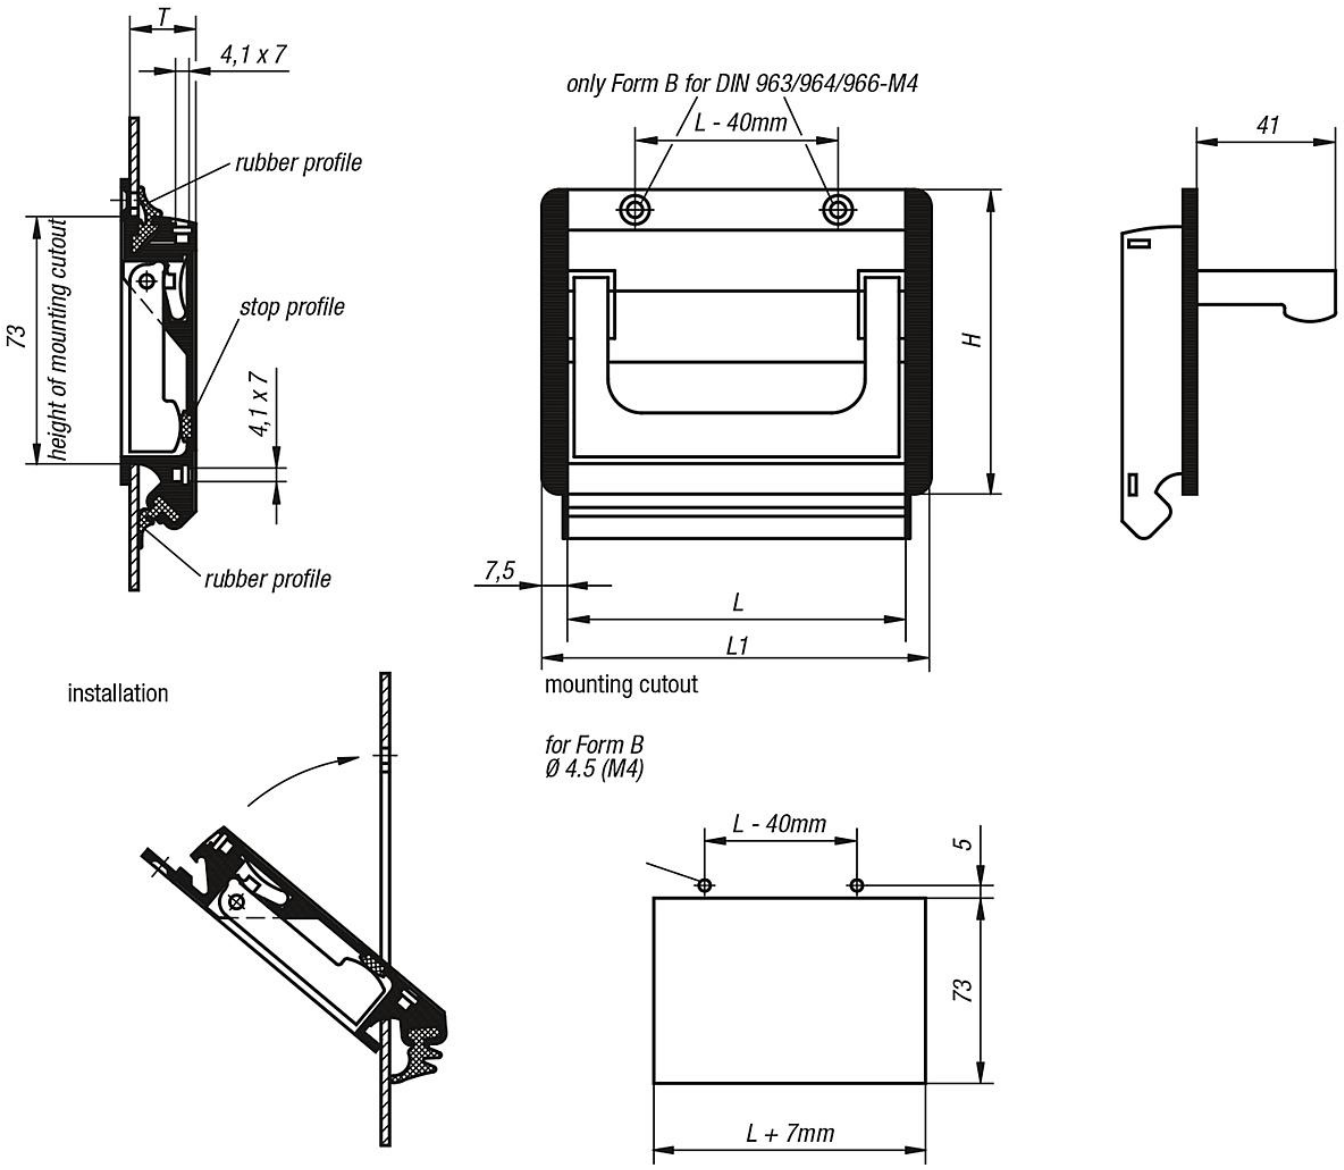

Overview of items

Recessed handles fold-down

Order No.	Main colour	Form	Type	H	L	L1	T	Mounting cutout	Load capacity N
K0239.10011	black anodised	A	plug-in	90	100	115	19,5	107 x 73	500
K0239.11811	black anodised	A	plug-in	90	118	133	19,5	125 x 73	500
K0239.16711	black anodised	A	plug-in	90	167	182	19,5	174 x 73	500
K0239.10013	natural anodized	A	plug-in	90	100	115	19,5	107 x 73	500
K0239.11813	natural anodized	A	plug-in	90	118	133	19,5	125 x 73	500
K0239.16713	natural anodized	A	plug-in	90	167	182	19,5	174 x 73	500
K0239.10021	black anodised	B	screw on	90	100	115	19,5	107 x 73	500
K0239.11821	black anodised	B	screw on	90	118	133	19,5	125 x 73	500
K0239.16721	black anodised	B	screw on	90	167	182	19,5	174 x 73	500
K0239.10023	natural anodised	B	screw on	90	100	115	19,5	107 x 73	500
K0239.11823	natural anodised	B	screw on	90	118	133	19,5	125 x 73	500
K0239.16723	natural anodised	B	screw on	90	167	182	19,5	174 x 73	500

© HEINRICH KIPP WERK KG