
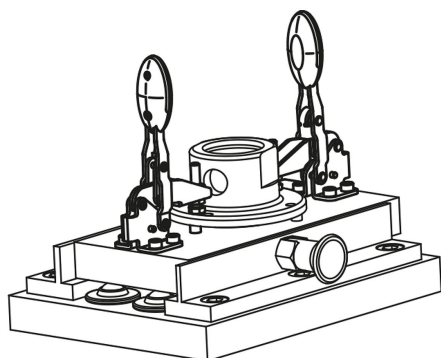


Toggle clamps horizontal with flat foot and adjustable clamping spindle, stainless steel

Item description/product images

KIPPlack

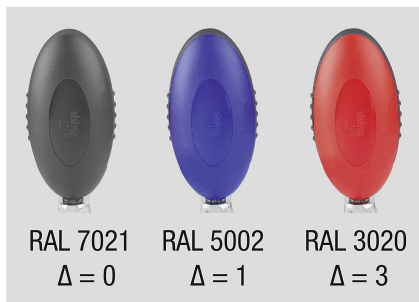

Description

Material:

Stainless steel.
Grip polyamide.

Version:

Bright.
Handle element blue, black or red.

Note:

Maintenance-free high quality link bushings. Sustainable constant use of force during opening and closing. Optimum stability through the conical, U-profile clamping arm.

On request:


Other grip colours.

Accessory:

K0106
K0384
K0390
K0392
K0667

Toggle clamps horizontal with flat foot and adjustable clamping spindle, stainless steel

Drawings

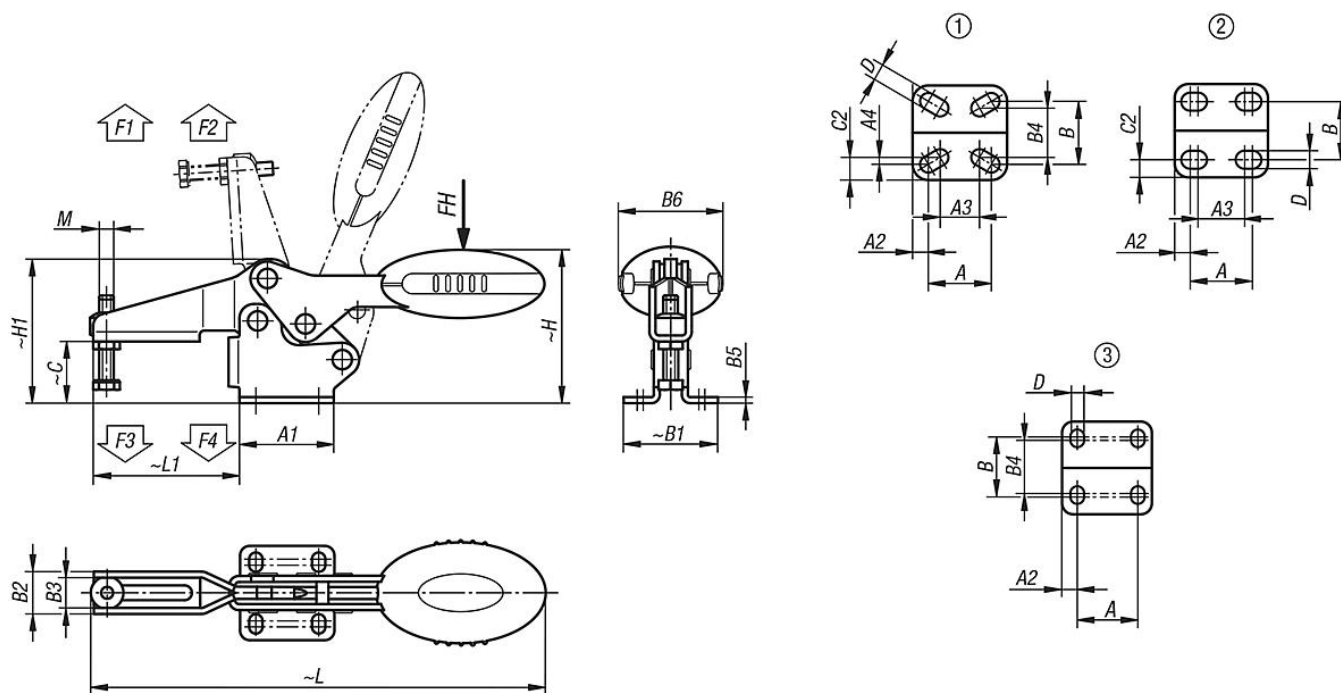

Overview of items

Toggle clamps horizontal with flat foot, stainless steel

Order No.	Component colour	hole arrangement	Opening angle of holding arm			Opening angle of handle	Hand force FH N	Retaining force F1 N	Retaining force F2 N	Clamping force F3 N	Clamping force F4 N										
K0660.104001	ultramarine RAL 5002	1	87°			69°	80	400	500	250	300										
K0660.105001	ultramarine RAL 5002	2	86°			67°	100	650	900	550	620										
K0660.106001	ultramarine RAL 5002	3	86°			67°	160	1350	1900	720	1200										
K0660.108001	ultramarine RAL 5002	3	86°			67°	200	2000	2800	830	1400										
K0660.104000	black grey RAL 7021	1	87°			69°	80	400	500	250	300										
K0660.105000	black grey RAL 7021	2	86°			67°	100	650	900	550	620										
K0660.106000	black grey RAL 7021	3	86°			67°	160	1350	1900	720	1200										
K0660.108000	black grey RAL 7021	3	86°			67°	200	2000	2800	830	1400										
K0660.104003	red	1	87°			69°	80	400	500	250	300										
K0660.105003	red	2	86°			67°	100	650	900	550	620										
K0660.106003	red	3	86°			67°	160	1350	1900	720	1200										
K0660.108003	red	3	86°			67°	200	2000	2800	830	1400										
Order No.	Component colour	M	A	A1	A2	A3	A4	B	B1	B2	B3	B4	B5	B6	C	C2	D	H	H1	L	L1
K0660.104001	ultramarine RAL 5002	M4x16	16	24	4	12,8	0,95	16	24	10,2	7,2	12,5	1,5	20	11,7	4,95	4,2	28,7	26,3	91,8	23,7
K0660.105001	ultramarine RAL 5002	M5x25	18	27	4,5	13,5	-	16,8	27,3	13,2	9,2	-	2	22,5	17,2	5,25	5,5	43,4	38,9	125,7	41,8
K0660.106001	ultramarine RAL 5002	M6x35	26	39	6,5	-	-	28	39	17,5	12,5	23	2,5	43,5	25,4	-	5,5	63,7	59,6	186,6	60,5
K0660.108001	ultramarine RAL 5002	M8x45	26	44	9	-	-	31	45	21	16	24	2,5	41,5	32,2	-	6,2	73,9	70,1	223,1	74,9
K0660.104000	black grey RAL 7021	M4x16	16	24	4	12,8	0,95	16	24	10,2	7,2	12,5	1,5	20	11,7	4,95	4,2	28,7	26,3	91,8	23,7
K0660.105000	black grey RAL 7021	M5x25	18	27	4,5	13,5	-	16,8	27,3	13,2	9,2	-	2	22,5	17,2	5,25	5,5	43,4	38,9	125,7	41,8
K0660.106000	black grey RAL 7021	M6x35	26	39	6,5	-	-	28	39	17,5	12,5	23	2,5	43,5	25,4	-	5,5	63,7	59,6	186,6	60,5
K0660.108000	black grey RAL 7021	M8x45	26	44	9	-	-	31	45	21	16	24	2,5	41,5	32,2	-	6,2	73,9	70,1	223,1	74,9
K0660.104003	red	M4x16	16	24	4	12,8	0,95	16	24	10,2	7,2	12,5	1,5	20	11,7	4,95	4,2	28,7	26,3	91,8	23,7
K0660.105003	red	M5x25	18	27	4,5	13,5	-	16,8	27,3	13,2	9,2	-	2	22,5	17,2	5,25	5,5	43,4	38,9	125,7	41,8
K0660.106003	red	M6x35	26	39	6,5	-	-	28	39	17,5	12,5	23	2,5	43,5	25,4	-	5,5	63,7	59,6	186,6	60,5
K0660.108003	red	M8x45	26	44	9	-	-	31	45	21	16	24	2,5	41,5	32,2	-	6,2	73,9	70,1	223,1	74,9