

Toggle clamps vertical with straight foot and fixed clamping spindle

Item description/product images



Description

Material:

Steel.

Version:

Electro zinc-plated steel.

Plastic handle, oil-resistant.

Note:

A neoprene thrust pad is supplied with version K1244.00800.

Accessory:

K0688

K0689

K0690

K0101

K1442

K0102

K0103


K1443

K0104

K0106

Toggle clamps vertical with straight foot and fixed clamping spindle

Drawings

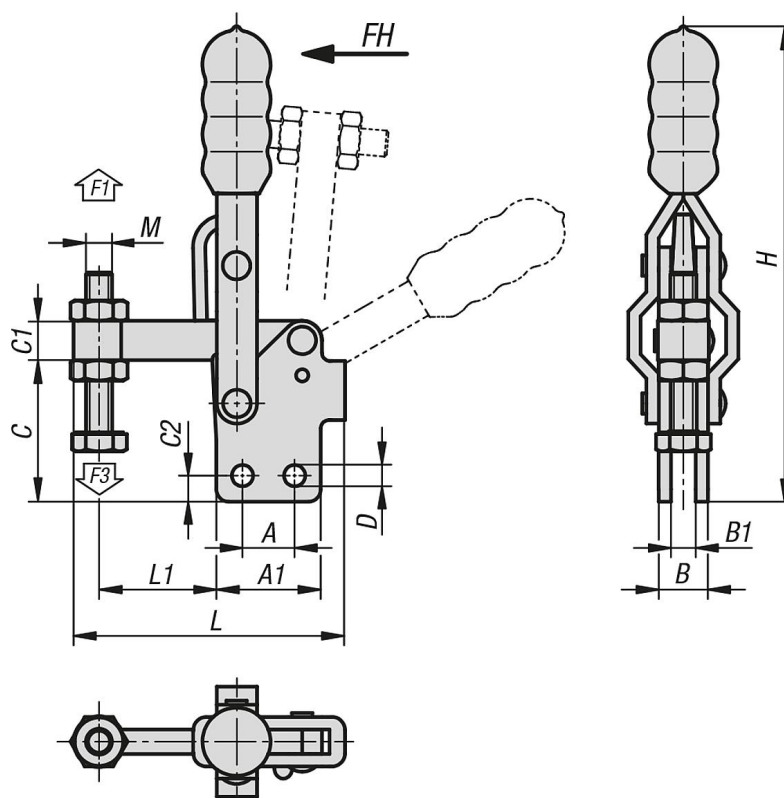

Overview of items

Toggle clamps vertical with straight foot and fixed clamping spindle

Order No.	Opening angle of holding arm					Opening angle of handle		Hand force FH N	Retaining force F1 N	Clamping force F3 N		
K1244.00800	95°					60°		100	800	600		
K1244.03400	90°					70°		200	3400	1600		
K1244.04400	90°					70°		250	4400	1600		
K1244.05400	100°					50°		280	5400	1800		
Order No.	A	A1	B	B1	C	C1	C2	D	H	L	L1	M
K1244.00800	12,7	25,4	12	6	34,5	9,6	6,4	5,2	116	65,8	28,6	M6x44
K1244.03400	32	50	16	8	64	22	9,5	8,3	240	124,25	65	M10x80
K1244.04400	32	53	20	10	70,4	25	9,5	8,7	245	138,25	74	M12x100
K1244.05400	50,8	76,2	20	10	113,5	31,8	12,7	12,3	335	197,5	107,8	M16x150